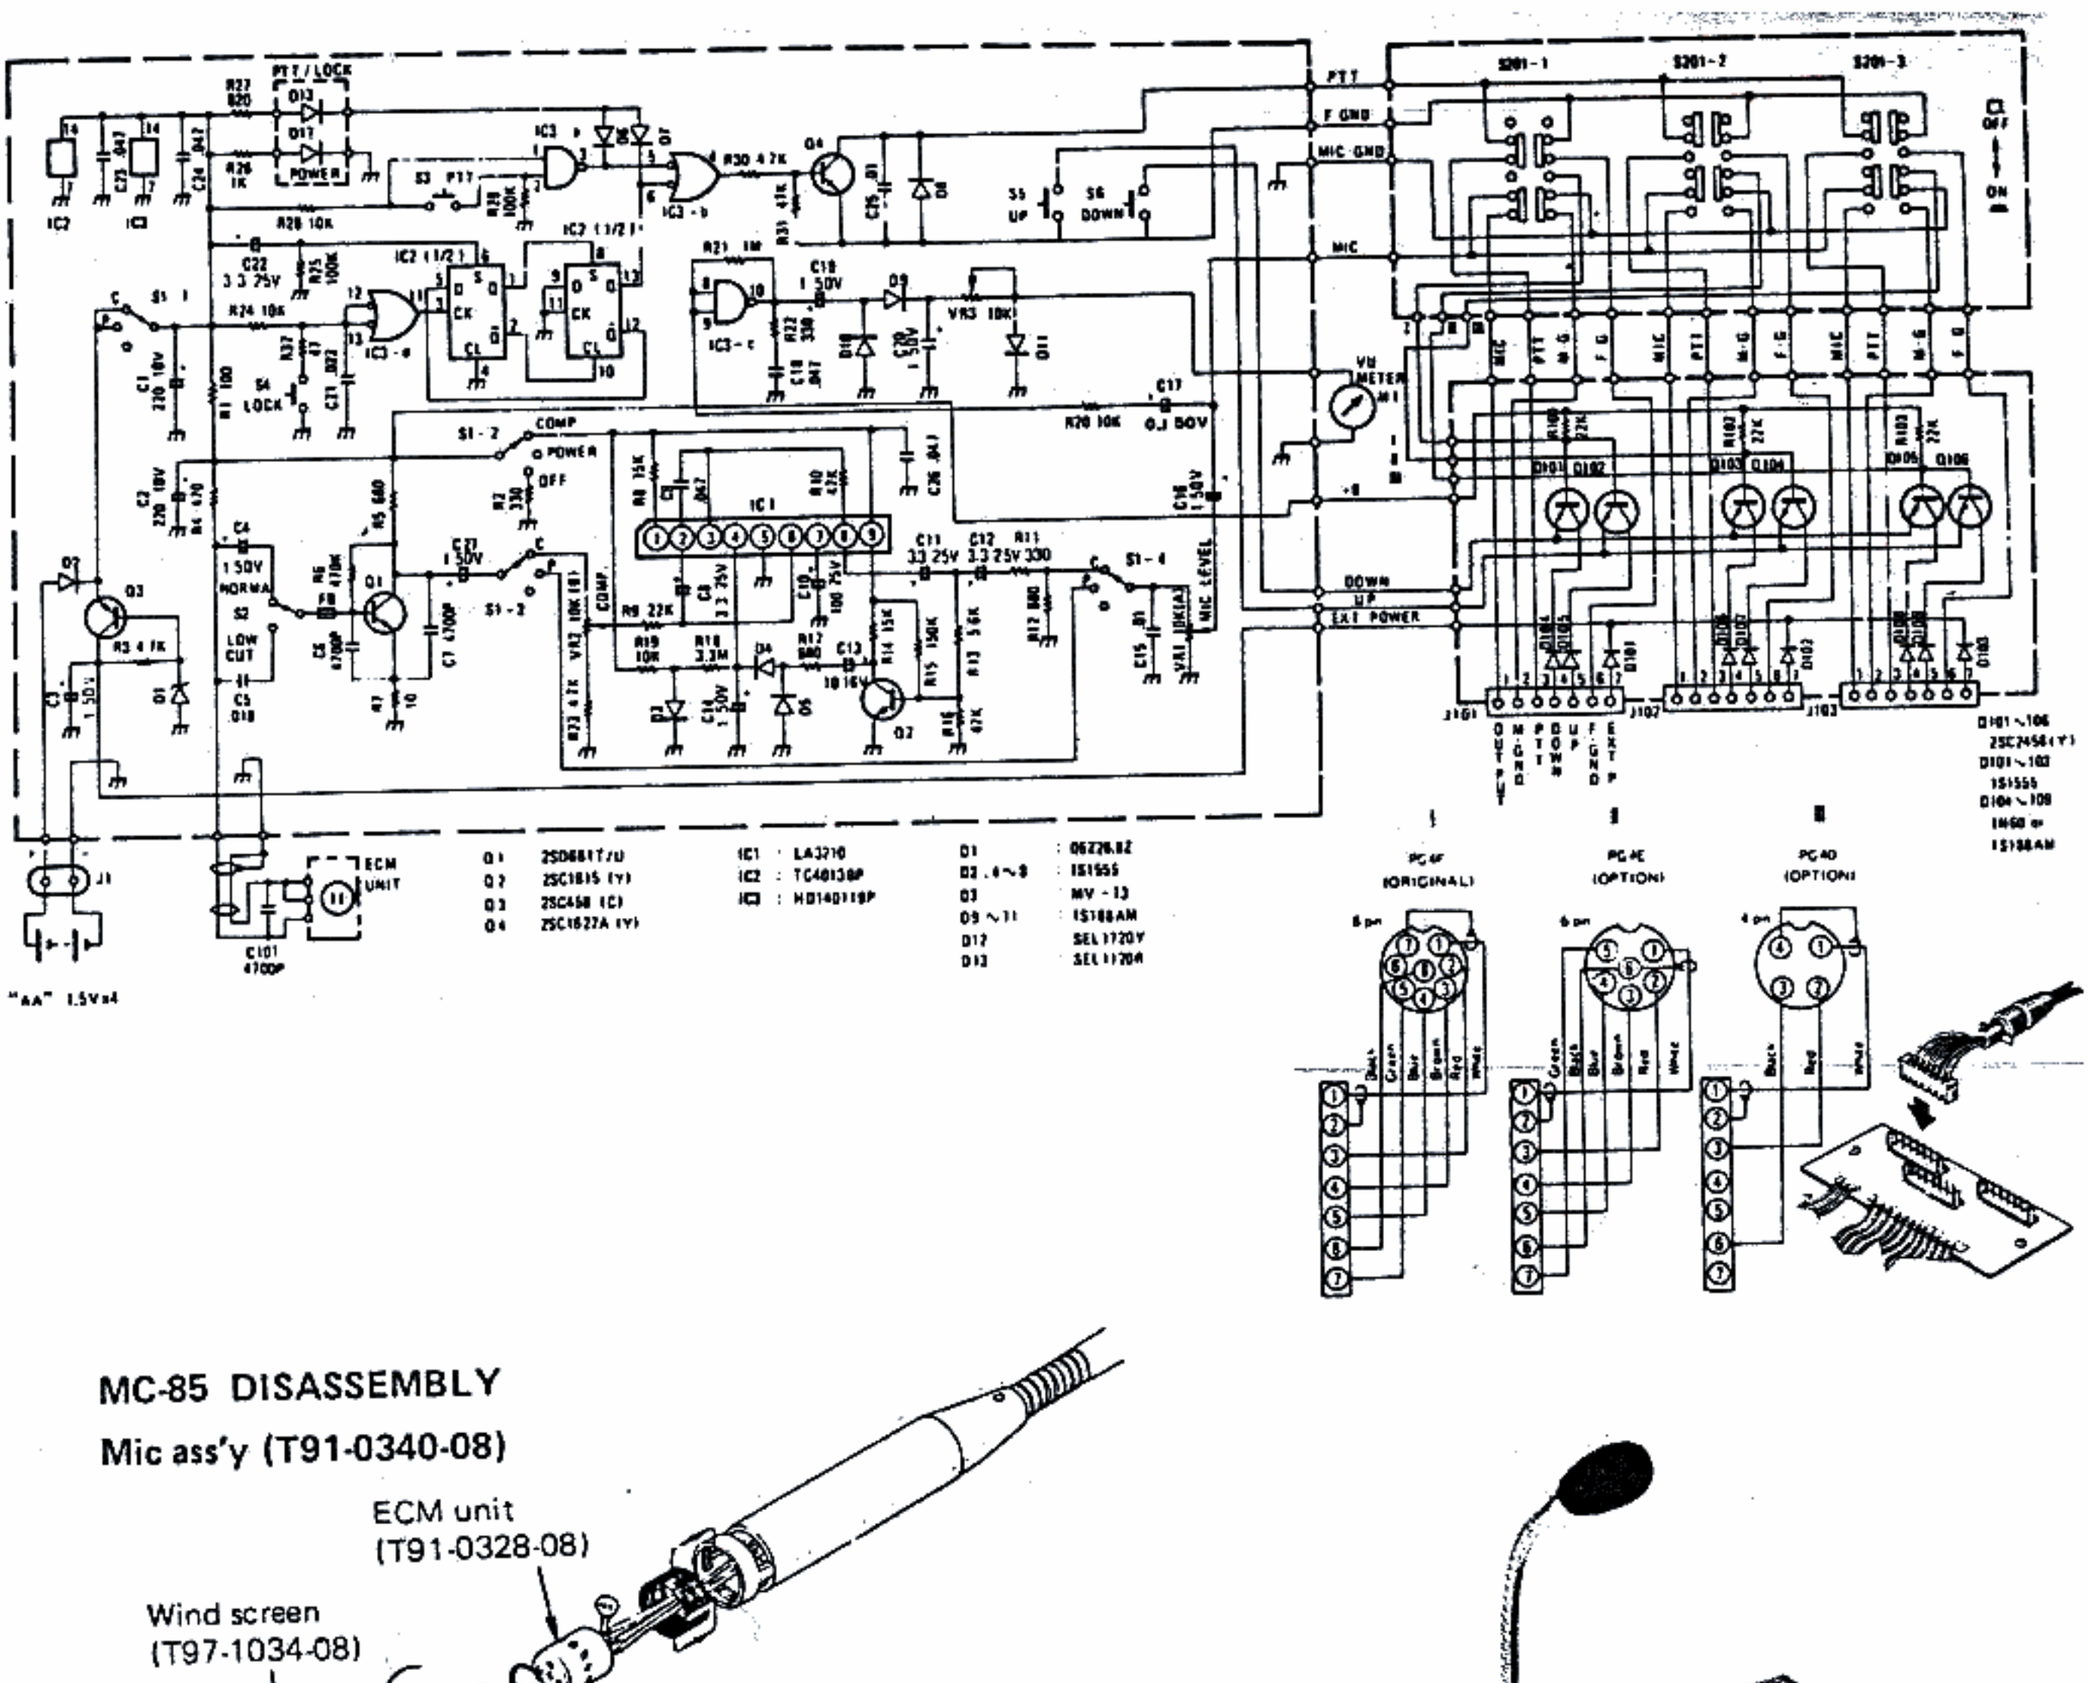

Q1	2SD681T/U	IC1	LA3210	D1	06Z6.8Z
Q2	2SC1815 (Y)	IC2	TC4013BP	D2 ,4 ~ 8	1S1555
Q3	2SC458 (C)	IC3	HD14011BP	D3	MV - 13
Q4	2SC1622A (Y)			D9 ~ 11	1S188AM
				D12	SEL1720Y
				D13	SEL1720M

MC-85 DISASSEMBLY

Mic ass'y (T91-0340-08)

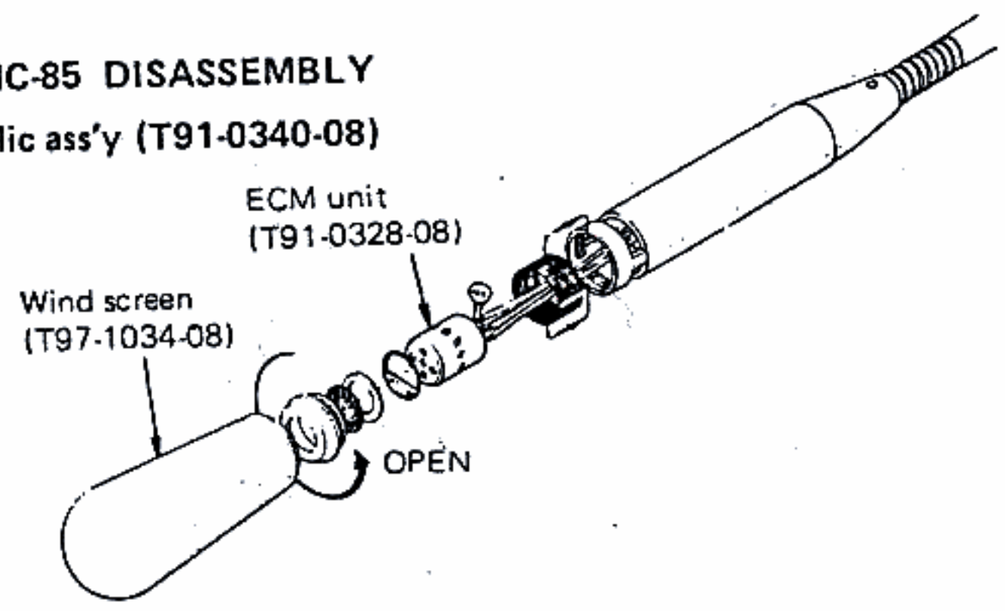

MC-85 REMOVAL METHOD

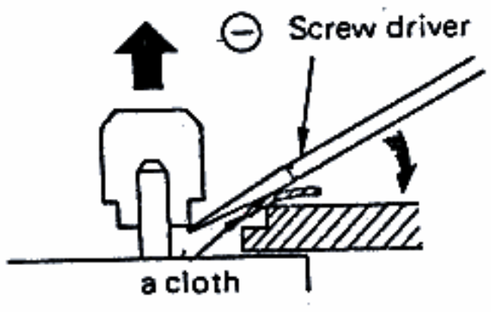

MC-85 SPECIFICATIONS

Type	Unidirectional electret condenser microphone
Impedance	Approx. 700Ω
Sensitivity	MIC LEVEL MAX COMP·OFF –40dB±6dB COMP·IN –34dB±6dB
Frequency response	NORMAL 300–7000Hz LOW CUT Approx. –12dB/300Hz
Speech compresser	Maximum compression level 35dB±3dB Maximum input level –30dB±4dB
Power supply	6V ("AA" batteries 1.5V x 4) Batteries not supplied.
Current consumption	Receive Approx. 9mA Transmit Approx. 11mA
Weight	Approx. 1kg (2.2lbs)

Schematheek
Beh. T. Hultermans
Postbus 4228
5604 EE Eindhoven